POLES

DECORATIVE ALUMINUM POSTS

18 Ft
16 Ft
14 Ft
12 Ft
10 Ft
8 Ft
6 Ft
4 Ft
2 Ft

Base Dimensions & template

HT	Base Height	41-1/8”
DIA	Base Diameter	10-13/16”
BC	Bolt Circle	7”
BP	Bolt Project	1-7/8”

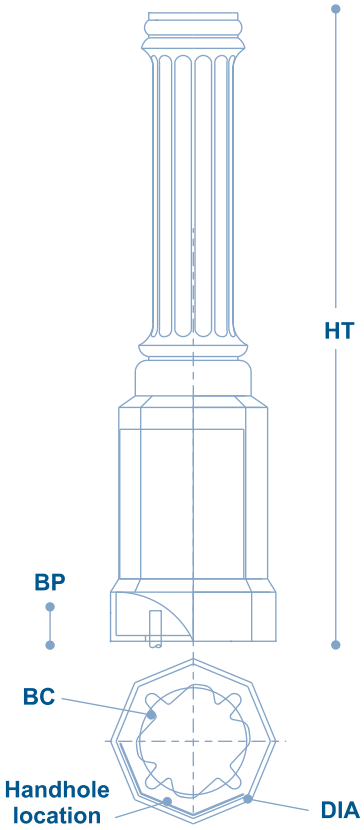

POLE HEIGHT	CODE
10 Ft	10
12 Ft	12
14 Ft	14
16 Ft	16

WALL THICKNESS	CODE
0.125”	A
0.188”	B

SHAFT DIAMETER	CODE
4 Inches	4

Coopersville

BASE STYLE	CODE	CPL

Pole Specifications

Pole Base: Decorative Cast Aluminum ASTM 356.2 alloy manufactured by means of Gravity casting and Permanent Mold.

Pole Shaft: Straight Extruded Aluminum tubing, 6063-T6 alloy, either smooth or fluted patterned.

Tenon: Cast Aluminum ASTM 356.2 alloy manufactured by means of Gravity casting and Permanent Mold.

Grounding Provision: Standard built-in boss to accommodate grounding log.

Hardware: Stainless steel allen head fasteners

Anchor Bolts: 3/4” or 1” x 16” long steel, hot deep galvanized.

Finishing: Polyester powder coating, electro-statically applied and thermoset cured.

SHAFT STYLE		CODE
	FLUTED EXTRUDED	FE
	SMOOTH EXTRUDED	SE
Top Dia (TD)  Bott Dia (BD)	CAST SHAFT - 8’ TD= 3 3/8” BD= 4 9/16”	P8
	Check Accessories / Ordering Guide Page	

AMERICAN POLE
manufacturing company

1492 Westford Circle, Suite 105 Westlake, OH 44145 Ph: 440 666 9556 - Web site: www.american-pole.com